


Magnetic sensor MSAC200

absolute rotation with flexCoder technology

Profile

- Industrial and medical applications e.g., motor feedback, handling automation and robotics
- Integration into small installation space possible
- Absolute resolution up to 20 Bit
- Repeatability 0.01°
- Reading distance ≤ 0.6 mm
- Interface BiSS C, SSI, CANopen
- Optionally with digital output circuit line driver
- Magnetic absolute encoder single-turn
- Industry 4.0 ready.

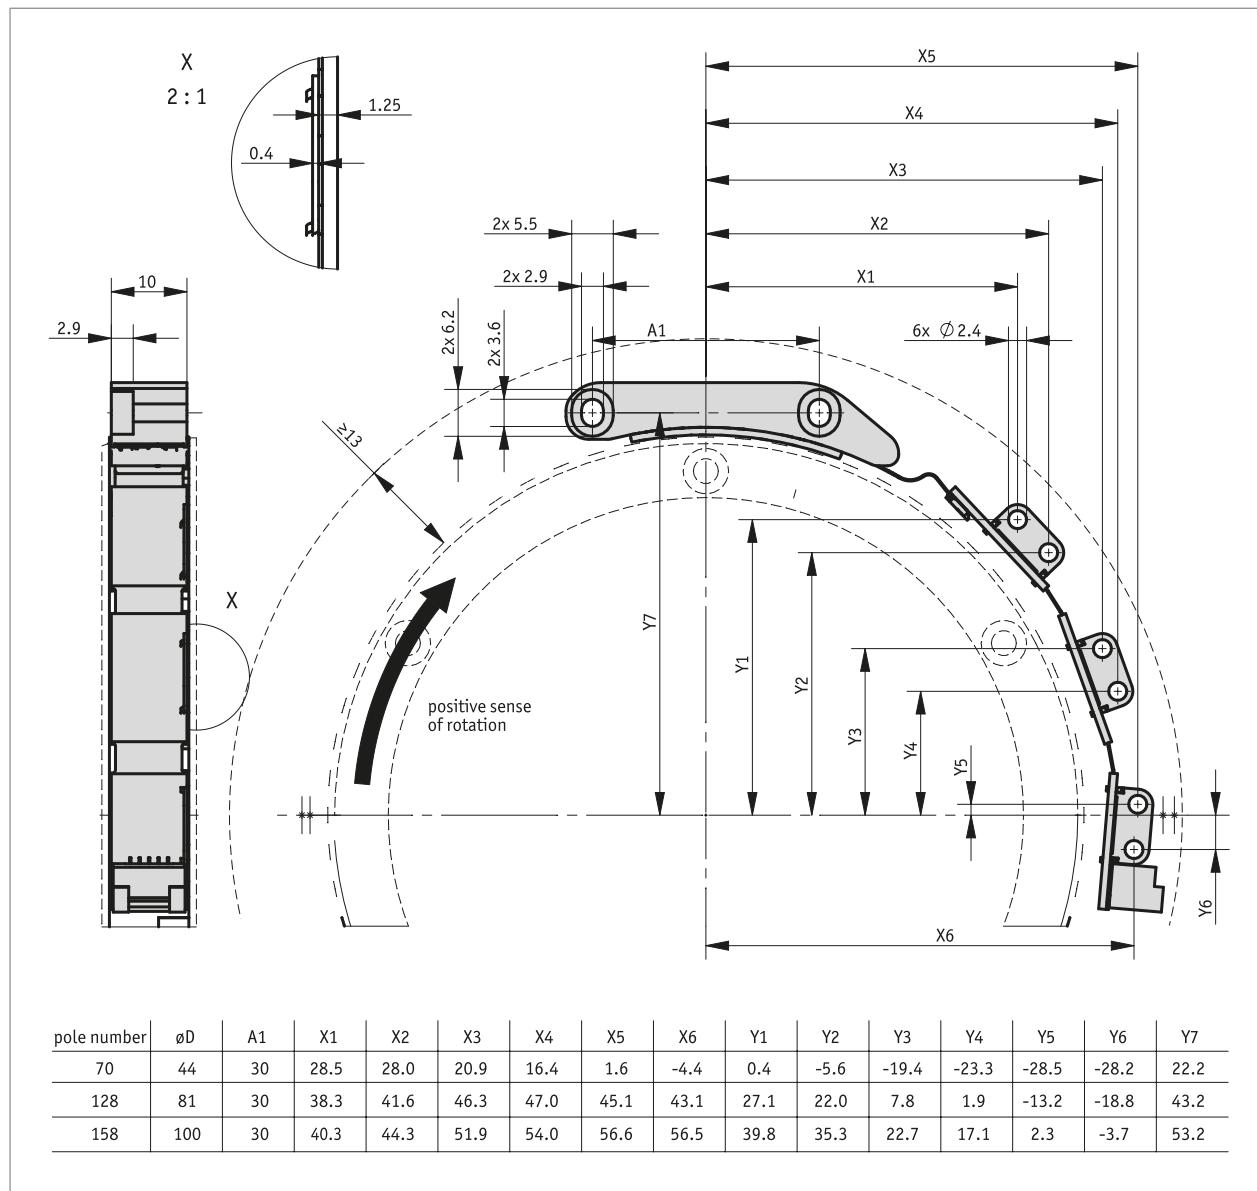

Magnetic sensor MSAC200

absolute rotation with flexCoder technology

Mechanical data

Feature	Technical data	Additional information
Housing design	open circuit board	
Material	aluminum	reader head
Sensor/ring reading distance	≤0.6 mm	
Weight	15 g	

Electrical data

■ SSI, BiSS C interface

Feature	Technical data	Additional information
Operating voltage	4.5 ... 30 V DC	reverse polarity protection
Power input	<1.5 W	
Output circuit	LD	
Interface	BiSS C, SSI	
Real-time requirement	speed-proportional signal output	LD output
Type of connection	JST plug connector	SM10B-GHDS-A-GAN-TF


■ CANopen interface

Feature	Technical data	Additional information
Operating voltage	4.5 ... 30 V DC	reverse polarity protection
Power input	<1.5 W	
Status display	three-color LED (red/green/yellow)	device status/CAN status
Output circuit	LD	
Interface	according to ISO 11898-1, not electrically isolated	CANopen, CiA 301, CiA 303, CiA 305, CiA 406
Address	1 ... 127	Node ID, via SDO
Baud rate	20 kbit/s 50 kbit/s 125 kbit/s 250 kbit/s 500 kbit/s 800 kbit/s 20 kbit/s 1 Mbit/s	
Cycle time	1.5 ms, typical	
Heartbeat	<150 ms	
Starting time	100 ... 500 ms	
Parameter	as specified by CiA DS-301, DS-406, DS-303 Part 3, EN 50325-5	CANopen
Type of connection	JST plug connector	SM10B-GHDS-A-GAN-TF

■ LD output circuit

Feature	Technical data	Additional information
Output signals	A, /A, B, /B	
Output signal level high	>2.5 V	
Output signal level low	<0.5 V	


■ Signal pattern, LD output circuit

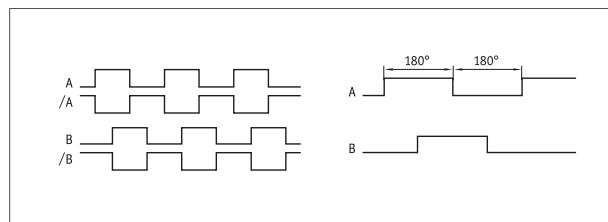

Magnetic sensor MSAC200

absolute rotation with flexCoder technology

■ Pulse interval, LD output circuit

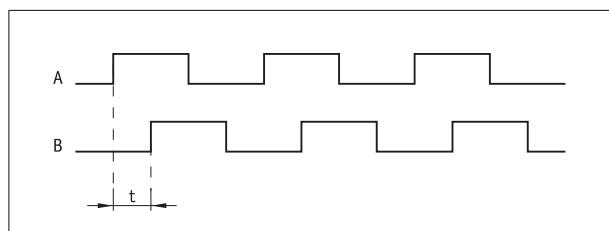

Example: Pulse interval $t = 1 \mu\text{s}$

(i. e., the downstream unit must be able to process 250 kHz)

$$\text{Formula for counting frequency} = \frac{1}{1 \mu\text{s} \times 4} = 250 \text{ kHz}$$

System data

Feature	Technical data	Additional information
Pole length	2 mm	incremental track
Resolution	system resolution absolute = scaling factor absolute (MSAC200) * number of poles (MRAC200)	with SSI, BiSS C, CANopen interface
	system resolution incremental = scaling incremental (MSAC200) * number of poles (MRAC200) * 4	with LD output circuit
Scaling factor	8 bit, 9 bit, 10 bit, 11 bit, absolute 8 bit, 9 bit, 10 bit, 11 bit, incremental	
System accuracy	$\pm 0.155^\circ$ $\pm 0.131^\circ$ $\pm 0.114^\circ$ $\pm 0.096^\circ$ $\pm 0.082^\circ$ $\pm 0.085^\circ$ $\pm 0.071^\circ$	with 70 poles with mechanical concentricity of the system $\leq 100 \mu\text{m}$ with 86 poles with mechanical concentricity of the system $\leq 100 \mu\text{m}$ with 102 poles with mechanical concentricity of the system $\leq 100 \mu\text{m}$ with 128 poles with mechanical concentricity of the system $\leq 100 \mu\text{m}$ with 158 poles with mechanical concentricity of the system $\leq 100 \mu\text{m}$ with 224 poles with mechanical concentricity of the system $\leq 150 \mu\text{m}$ with 396 poles with mechanical concentricity of the system $\leq 200 \mu\text{m}$
Repeat accuracy	0.01 °	unidirectional
Measuring range	$\leq 360^\circ$	singleturn
Circumferential speed	$\leq 5 \text{ m/s}$	absolute

■ Incremental LD peripheral speed

Incremental scaling [bit]	Peripheral speed Vmax [m/s]					
	8	7.81	3.13	1.56	0.78	0.31
9	7.81	3.91	1.56	0.78	0.39	0.16
10	3.91	1.95	0.78	0.39	0.20	0.08
11	1.95	0.95	0.39	0.20	0.10	0.04
Pulse interval [μs]	0.10	0.20	0.50	1.00	2.00	5.00
Counting frequency [kHz]	2500.00	1250.00	500.00	250.00	125.00	50.00

Information on the speed as a function of the number of poles of the magnetic rings can be found in the assembly instructions.

Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 105 °C -40 ... 85 °C	BiSS C, SSI CANopen
Storage temperature	-40 ... 105 °C -40 ... 85 °C	BiSS C, SSI, without packaging CANopen, without packaging
Relative humidity	95 %	condensation inadmissible
EMC	EN 61000-6-2 EN 61000-6-4	interference resistance / immission Interference emission/immission (EMC according to the standards listed is ensured when the motor feedback system is mounted in an electrically conductive housing connected to the central grounding point of the motor regulator via a cable shield. If other shield concepts are used, the user must carry out his own tests.)
Protection category	IP00	
Shock resistance	$\leq 1000 \text{ m/s}^2$, 6 ms	EN 60068-2-27, 3 axes (+/-), each 3 shocks
Vibration resistance	$\leq 200 \text{ m/s}^2$, 10 ... 2000 Hz	EN 60068-2-6, 3 axes, each 20 cycles

Magnetic sensor MSAC200

absolute rotation with flexCoder technology

pin assignment

SSI	BiSS C	CANopen	PIN
B	B	B	1
/B	/B	/B	2
A	A	A	3
/A	/A	/A	4
T-	NMA	nc	5
D-	NSLO	CAN_GND	6
T+	MA	CAN_L	7
D+	SLO	CAN_H	8
+UB	+UB	+UB	9
GND	GND	GND	10

Industry 4.0


In most cases, data exchange with the magnetic encoders is limited to the exchange of process data. In addition to the process data, intelligent drives provide additional information that can be evaluated for condition monitoring up to predictive maintenance:

Process data	Smart Value	Smart Function
Actual position	Temperature	Plausibility monitoring

Hint for mounting

When you mount the sensor and magnetic tape, please be careful to align both system components correctly.

A, Sensor/tape reading distance	0.1 ... 0.6 mm
B, Lateral offset	$\pm 0.5 \text{ mm}$
C, Alignment error	$\pm 0.5^\circ$

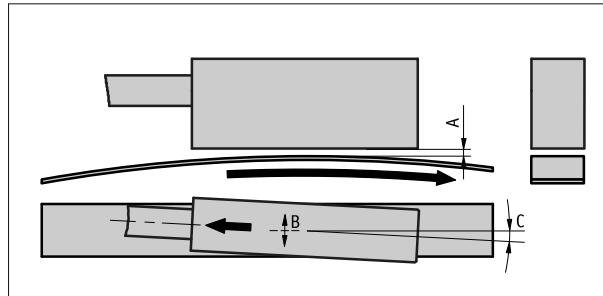

Symbolic representation

Magnetic sensor MSAC200

absolute rotation with flexCoder technology

Order

■ Ordering information

One or more system components are required:

Magnetic ring MRAC200

www.siko-global.com

■ Ordering table

Feature	Ordering data	Spezifikation	Additional information
design	A 70 128 158	70 poles 128 poles 158 poles others on request	
Interface	B BiSS/C SSI CAN	BiSS C SSI CANopen	
absolute scaling	C 8 9 10 11	8 bit 9 bit 10 bit 11 bit	
incremental scaling	D 8 9 10 11	8 bit 9 bit 10 bit 11 bit	
Pulse interval	E ...	0.1, 0.2, 0.5, 1, 2, 5 in μ s	

■ Order key

MSAC200 - - - - LD - -



Scope of delivery:

MSAC200, Quick Start Guide