


### Profile

- Heavy-duty design in stainless steel
- Compact design (42 mm diameter)
- IP69K, IP68 protection category
- Resistant to salt spray and acids
- CANopen interface, SSI, analog
- Multi-turn without battery
- High shaft loadability of up to 270 N
- 16 bit multi-turn (65536 revolutions)
- 12 bit single-turn (4096 steps)

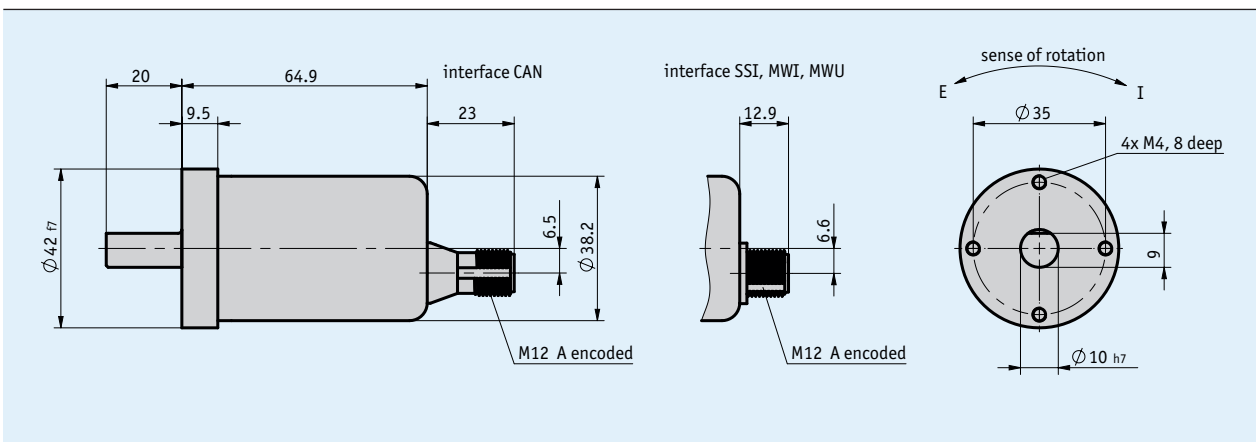

### Mechanical data

Feature	Technical data	Additional information
Shaft	stainless steel	
Flange	stainless steel	
Housing	stainless steel	
Speed	$\leq 12000$ rpm	
Starting torque	$\leq 4$ Ncm	at 25 °C
Shaft load rating	axial $\leq 270$ N	
	radial $\leq 270$ N	
Weight	$\sim 0.35$ kg	

### Electrical data

#### ■ Transducer, power output

Feature	Technical data	Additional information
Operating voltage	15 ... 30 V DC	4 ... 20 mA
Current consumption	typical 40 mA	4 ... 20 mA
Linearity	0.15 %	4 ... 20 mA
Load	RL $< 500 \Omega$	4 ... 20 mA, load against ground GND
Accuracy	$\pm 0.35^\circ$	singleturn, 4 ... 20 mA
Starting time	$< 1$ s	4 ... 20 mA
Settling time	80 ms	4 ... 20 mA

### ■ Transducer, voltage output

Feature	Technical data	Additional information
Operating voltage	12 ... 30 V DC	0 ... 10 V
Current consumption	typical 15 mA	0 ... 10 V
Linearity	0.15 %	0 ... 10 V
Load	RL >10 kΩ	0 ... 10 V, load against ground GND
Accuracy	±0.35°	singleturn, 0 ... 10 V
Starting time	<1 s	0 ... 10 V
Settling time	80 ms	0 ... 10 V

### ■ CANopen interface

Feature	Technical data	Additional information
Operating voltage	10 ... 30 V DC	reverse polarity protected
Power input	≤1.2 W	
Interface	according to ISO 11898, galvanically isolated	CANopen (DS406)
Address	adjustable	via SDO or Layer Setting Service (LSS)
Baud rate	≤1 MBit/s	
Cycle time	<1 ms	

### ■ SSI interface

Feature	Technical data	Additional information
Operating voltage	5 ... 30 V DC	reverse polarity protected
Power input	~0.25 W	
SSI clock speed input	100 kHz ... 2 MHz	
Interface	line driver to RS422	
Cycle time	<600 μs	

## System data

Feature	Technical data	Additional information
Resolution	12 bit (analog output) 12 bit (singleturn)	over the programmed measuring range
Measuring range	≥22.5° ≤1 revolution(s) ≤65536 revolution(s) 16 revolution(s)	singleturn multiturn factory setting (multiturn)

## Ambient conditions

Feature	Technical data	Additional information
Ambient temperature	-40 ... 85 °C	
Storage temperature	-40 ... 85 °C	
Relative humidity	98 %	condensation inadmissible
EMC	EN 61000-6-2 EN 61000-6-4	interference resistance / immission emitted interference / emission
Protection category	IP69K, IP68	EN 60529
Shock resistance	≤3000 m/s <sup>2</sup> , 6 ms	EN 60068-2-27
Vibration resistance	≤300 m/s <sup>2</sup> , 10 Hz ... 1 kHz	EN 60068-2-6

### Pin assignment

#### ■ MWI/MWU interface

Signal	PIN
I <sub>out</sub> /U <sub>out</sub>	1
+UB	2
GND	3
Set 2	4
Set 1	5

#### ■ CAN interface

Signal	PIN
CAN_GND	1
+UB	2
GND	3
CAN_H	4
CAN_L	5

#### ■ SSI interface

Signal	PIN
GND	1
+UB	2
SSI clock +	3
SSI clock -	4
SSI data +	5
SSI data -	6
calibration input	7
sense of rotation	8

### Order

#### ■ Ordering table

Feature	Ordering data	Specification	Additional information
Interface	CAN	CANopen (DS406)	
	MWI	4 ... 20 mA	
	MWU	0 ... 10 V	
	SSI/B	SSI binary	
	SSI/G	SSI gray	
Number of revolutions	1	singleturn	
	8192	13 bit	only SSI or CAN
	65536	16 bit	only MWI or MWU

#### ■ Order key



Scope of delivery: WV42HD

Accessories:  
Electronic display MA10/4  
Electronic display MA50

[www.siko-global.com](http://www.siko-global.com)  
[www.siko-global.com](http://www.siko-global.com)