
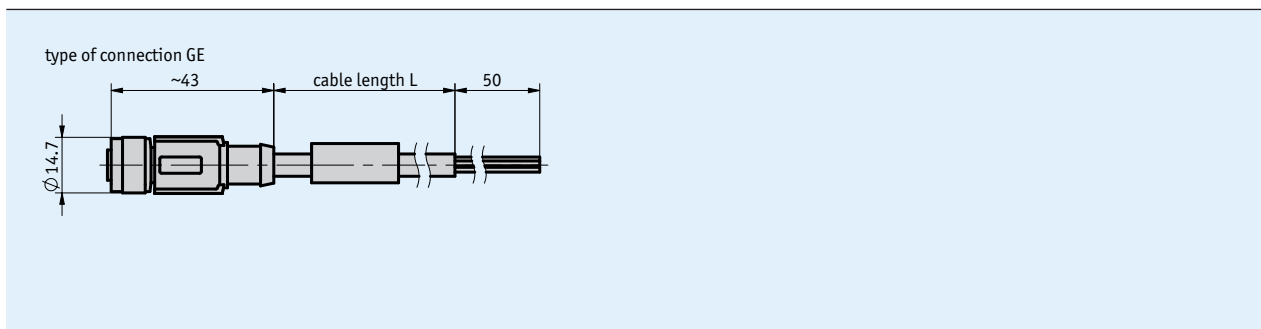


Profile

- Ready-to-use cable connection
- Cable length 3 m
- Connection technology M12 (A-coded), 5-pole

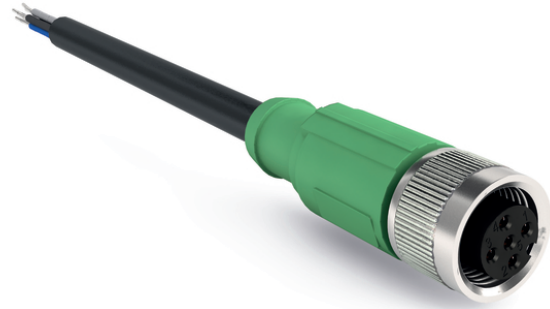

Mechanical data

| Feature | Technical data | Additional information |
|----------------------|---------------------------|--|
| Cable sheath | PUR drag chain-compatible | $\varnothing 5.9 \pm 0.2$ mm, 5×0.34 mm ² , screened |
| Cable bending radius | 59 mm | static/dynamic |

Ambient conditions

| Feature | Technical data | Additional information |
|---------------------|----------------|------------------------|
| Ambient temperature | -25 ... 80 °C | dynamic |
| | -40 ... 80 °C | static |

Order

- Order key

KV05S0 - GE - 03.0

Scope of delivery: KV05S0